

GROUND TRANSPORTATION (Packaging & Labeling)

LITHIUM METAL BATTERIES

SMALL SIZE

49 CFR, SPECIAL PROVISION 188

(GUIDE LINE AND REFERENCE ONLY, "HM" TRAINING CERTIFICATION REQUIRED)


- Cell is not more than 1g of lithium content.
- Battery is not more than 2g of lithium content.
- Effective 10-01-2009, cells or batteries must be a type of proven to meet the requirements of each test in the UN manual of Test and Criteria. Except:
 - Production runs, see 49CFR/172.102/special provision 29.
 - Shipment for testing (prototype), see 49CFR(e-CFR on web) 173.185/(e)

QUANTITY SHIP:

A-Less or equal 24 cells or 12 batteries per package:

- use strong outer packaging (non "UN" spec. box)
- prevent short circuit.
- use labels as shown.

FROM:
TO:

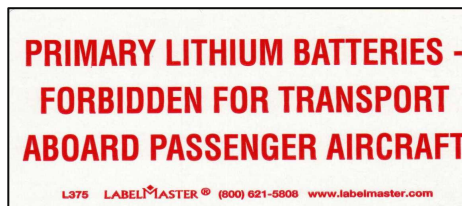

B-More than 24 cells or 12 batteries per package:

- 1.2m drop test box required.
- prevent short circuit.
- gross weight not exceed 30kg (66lbs) per package.
- use labels as shown.

FROM:
TO:

